


MP-AUS-1157 Dual Color Front Lamp Installation

- 1) Remove lamp lens and base. Remove any old gaskets.
- 2) Use PB Blaster or WD 40 to clean the contacts. Contact and spring must be clean and move freely!
- 3) Install gasket. This is **CRITICAL** without gasket in place properly lamp will short to housing and void warranty. Gasket can be slipped over board and installed.
- 4) Insert base into housing and test lamp. If base is difficult to insert into socket sand base contacts slightly to level.
- 5) Coil base wires into lamp housing. Be careful not to allow wires to be careful not to allow wires to be pinched.
- 6) Install spacers over #8 1 1/2 inch screws through lens and gasket. Spacers are critical to avoid crushing board.
- 7) Complete assembly be screwing lens/gasket/spacer assembly into original housing.

Critical Note ALL YEARS!

- 1) Insert parts in order shown below.
Gasket must be placed between board and housing as shown.
- 2) Place spacer between lens and board.
- 3) Do not over tighten!

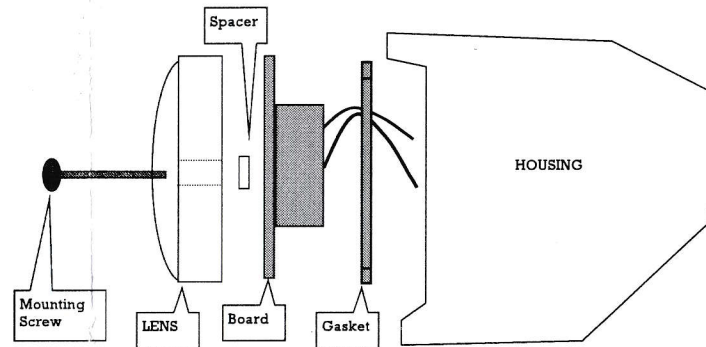

Warning! After the initial lamp test turn OFF ignition. Components on the LED module can get hot and installation with power applied voids the products warranty.

CRITICAL! REMBER TO INSTALL 1/4 INCH \$8 HOLLOW SPACERS

Instruction sheet p/n: 40-0006-00

