

# 1967-79 Ford Pickup Door Seal Installation



## HELPFUL TIPS

NOTE: It is necessary to use a weather stripping adhesive in order to install door seals. Dennis Carpenter Ford Reproductions recommends and sells 3M brand Weather Stripping Adhesive. Our part # is COAZ-19554-A

*Experience has shown us that taping the door seal into position before any adhesive is applied allows you to check the fit of the seal, cut the seal to proper length if necessary, and to aid in applying the seal.*

*Apply the adhesive to the door opening, not the seal. Glue around the door as described in the instructions below.*

*The best (and cleanest) results comes from glueing a section of the door at a time by removing the tape, applying the glue then reapplying the tape to hold the seal into position. After the adhesive has cured you can remove the tape.*

*Remember that new door seals are more resilient to compression and will cause your doors to close tightly.*

## INSTALL DOOR SEALS

*NOTICE: It is not necessary to remove the doors from the cab in order to replace the door seals.*

### STEP 1

*Remove the old door seals and glue material from the door opening. Clean thoroughly where the seals are to be adhered. A degreaser/ wax remover solution is recommended.*

### STEP 2

*Arrange the new door seal so that a beginning end is at bottom center of the door opening.*


### STEP 3

*Applying the door seal by moving towards the rear of the door opening, up the lock side, across the top, down the hinge side. Trim the excess where the two ends meet.*

### STEP 4

*Begin the adhesion process as described in the HELPFUL TIPS section, moving from bottom center around the door opening in a clockwise manner.*

CLEAN DOOR SEAL AREA  
BEFORE INSTALLATION

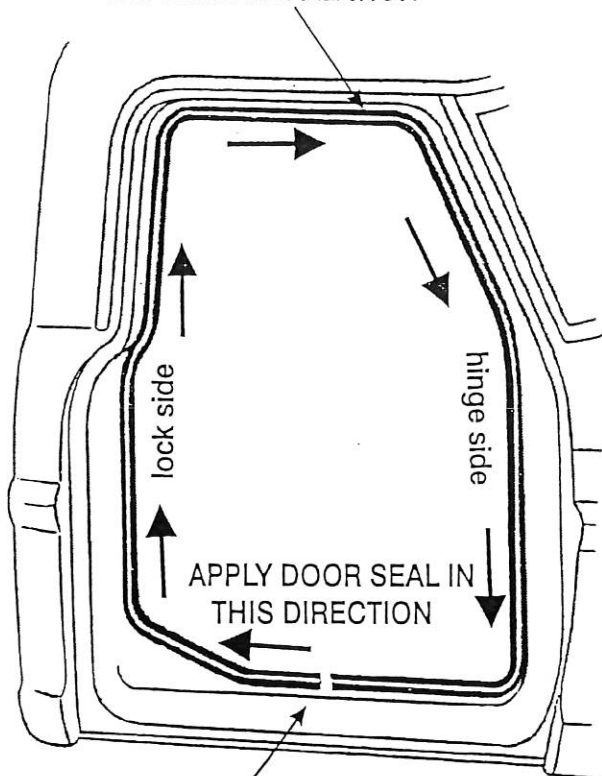

START APPLICATION AT  
BOTTOM CENTER



Manufacturing Quality Ford Restoration Parts

**1-800-476-9653**

4140 CONCORD PARKWAY SO., CONCORD, NC. 28027

[www.dennis-carpenter.com](http://www.dennis-carpenter.com)